

Harvest Master™ Grain Trailer



Standard Trailer Specifications*

Dimensions	40' Length x 96" Width x 68" Side Height
Lighting	Standard LED Lighting
King Pin/Coupler Height	18" / 49"
Color	White, Black or Gray
Internal Viewing	Sight Glass Windows on Driver's Side
Sides	14 GA, Corrugated Walls
Hoppers	(2) 14 GA. Hoppers, 24" Openings

Axles	25,000 lb. 5" Tubular, 5/8" Wall
Suspension	50,000 lb. 4-Spring Tandem
Tires/Wheels	11R X 24.5 14 Ply Radials / 10 Hole Hub Piloted Steel
Ladders/Platform	Front and Rear
Paint	High-Gloss, Reverse-Impact, UV-Protectant, Rust-Inhibiting
Tarp	18 oz. Manual Roll Tarp, Removable Headers and Bows
Landing Gear	2-Speed

**Standard features or specifications are subject to change without notice.*

Details





Sight Glass Windows
Allows view inside the trailer from the ground.



Butterfly Door Crank
Easy-open operation with flip over locks.

Grain Trailer Line Drawing

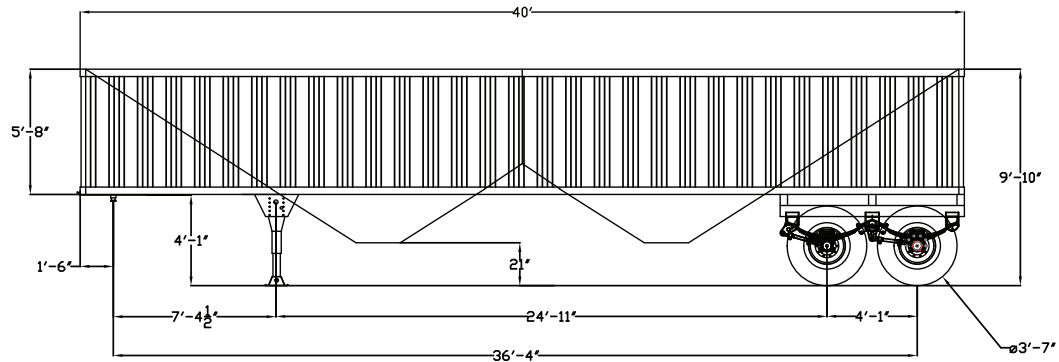

Options

- » 30" or 36" Hopper Doors
- » Air Ride Suspension
- » Aluminum Wheels
- » Custom Colors
- » Hopper Work Lighting
- » Side Chutes
- » Vibrators
- » 2-Speed Doors
- » Electric Doors
- » Aluminum Ladders, Platforms
- » Numerous Tarps, Colors
- » Electric Landing Gear
- » Custom Heights, Lengths
- » Sloped Ends
- » Undercoating
- » OEM 22.5 Tires

Grain Hopper Volume Capacity (Water Level)

DOUBLE HOPPER	68"			78"		
	Cubic ft.	Bushel	Weight (±3%)	Cubic ft.	Bushel	Weight (±3%)
34' Straight	1,224	983	10,750	1,433	1,152	11,100
36' Slope	1,227	986	10,900	1,436	1,154	11,300
36' Straight	1,267	1,018	11,000	1,489	1,196	11,350
38' Slope	1,267	1,018	11,050	1,489	1,196	11,400
38' Straight	1,330	1,069	11,100	1,565	1,257	11,500
40' Slope	1,333	1,071	11,200	1,568	1,260	11,550
40' Straight	1,400	1,125	11,220	1,647	1,323	11,600
42' Slope	1,402	1,126	11,300	1,648	1,325	11,700
42' Straight	1,459	1,173	11,400	1,719	1,381	11,800

Standard Grain Trailer Standard Rice Trailer



CONSTRUCTION
TRAILER
SPECIALISTS ●●

For more information, please visit our website at constructiontrailerspecialists.com or call us toll free at 888-669-0003.